

# OPERATION MANUAL

First read the manual carefully before you start using the safe.

## Product description:

This product is designed for moderate security risks in domestic premises and is not fire resistant.

## Installation:


Choose a location where this product will be convenient to use, but not easily visible to an intruder. Inside a fitted wardrobe or cupboard is often suitable. If possible, select a position where the unit can be bolted to both wall and floor as security will be much higher if it is fixed to two surfaces. Wall fixing must always be to a solid wall, not a stud wall.

## Preparation for use:

This product is battery operated. Batteries are not supplied. Only use 1.5V Alkaline AA batteries. For your convenience, we have engineered a manual override system for your safe. To open the door of the safe for the first time, just remove the battery cover plated (d)(see diagram 1). You will find the keyhole, insert the key into the keyhole and turn it in a counter-clockwise direction, turn the knob (a) in a clockwise direction. This will manually open your safe. To install the batteries, just remove the battery cover plate and install the four batteries. Ensure the + and - positions are correct. The display (e) will scan the status of the electronic system automatically. If it is in order the display will show "goods".

## Opening the safe after installing the batteries:

To open the door of the safe, press the button "START"(c)(see diagram 1), the display on the panel will show "-----", then input one of the two sets of factory-preset codes: 0.0.0.0.0.(user code) or 8.8.8.8.8.(master code) immediately and confirm by pressing the button "START". The green light (f) will be on with the display showing "OPEN" and door using the knob within 4 seconds. If you do not want the display to show your codes when you open the safe, just press the button "START" twice at the first time of pressing and other steps are the same.

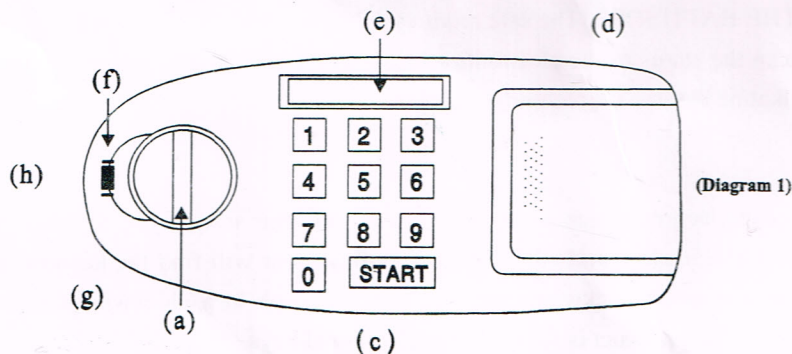

## Programming the code:

The safe can be programmed with two sets of codes. For your safety, after opening the safe and installing the batteries, you should programme two sets of your new codes to take place of two sets of factory-preset codes.